



Features

- Excellent color rendering (90+ CRI)
- 3000K color temperature
- Two sizes available with up to 864 lumens
- Low profile design, as little as 1" high
- Dimmable with most ELV and TRIAC dimmers
- Compatible with standard depth and 'pancake' junction boxes
- Includes mounting hardware for recessed or surface mount applications
- cETLus Listed for indoor/wet locations
- 35,000 hours rated life
- ENERGY STAR certified

Available Finishes



White

Dimming Options

- ELV (5-100%)
- TRIAC (5-100%)

Mounting Options

- 5" / 6" (ST56) 3" / 4" (ST4) Recessed Housings
- Standard Junction Box (Surface mount)

Listing / Ratings




Satellite Bevel Disc Light

Multi-purpose Satellite Bevels can be used for recessed retrofit for multiple can sizes, or surface mount retrofits with standard and pancake ceiling boxes. The low profile bevel design is available in two sizes with 3000K energy-saving dimmable LED light and an on-board driver. Attached heavy duty aluminum heat sink ensures longevity and polycarbonate lens diffuses and softens light.

Technical Information

Series	ST4 & ST56
Input Voltage	120V AC, 60Hz
CCT	3000K
CRI	90+
Wattage	8.1W / 9.6W
Lumens	729Lm / 864Lm
Beam Angle	110°
Dimmable	5-100%
Mounting	Recessed (housing) / Surface mount (junction box)
Rating	cETLus Listed (Indoor/wet location)
Rated Life	35,000 hrs

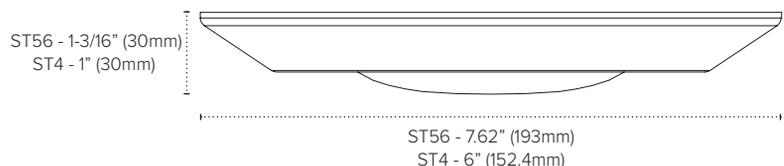

ST56 Satellite Bevel



ST56 Satellite Bevel - White
ST56-30-WH (9.6W / 3000K / 864Lm)

ST4 Satellite Bevel



ST4 Satellite Bevel - White
ST4-30-WH (8.1W / 3000K / 729Lm)

TRULUX LIGHTING SYSTEMS

TASK LIGHTING

SATELLITE BEVEL
DOWNLIGHTING

LINEAR LIGHTING

ARCHITECTURAL LIGHTING

POWER SUPPLIES