

SATELLITE MINI



Three in one. Adjustable mounting allows for installation in 3" and 4" recessed housings; or 4" junction box installation using included j-box mounting bracket.

Performance

- Warm White (3000K) LED light with 82+ CRI
- Low profile design measures only 1" high
- Dimmable with most standard incandescent (triac) and low voltage electronic (ELV) dimmers for 10-100% light control
- Long life LEDs last up to 35,000 hours, 23 times longer than incandescent lamps rated at 1,500 hours
- cETLus Listed for damp locations

Construction

- Remote replaceable driver has heavy duty plastic housing
- Disc light's PCB is adhered to thick gauge aluminum heat sink
- Steel torsion clips (recessed can installation) or mounting bracket (junction box installation) hold fixture flush with ceiling
- Matte white polycarbonate trim is durable
- Frosted polycarbonate lens diffuses light



Installation

- Attach torsion clips as marked for 3" or 4" recessed cans
- For 4" junction standard depth box installation, E26 socket adaptor is omitted (remote driver is always required)

Photometrics

ST-MINI-30-WH

Luminous flux	654Lm
Maximum intensity	243 cd
Input wattage	9.2W
Lumens per watt	71 LPW
Beam angle	109.6°

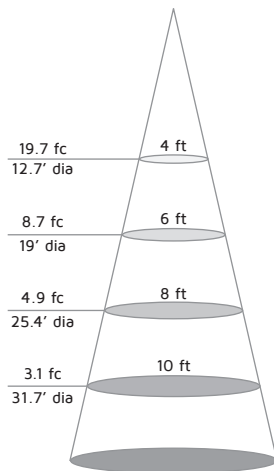

Specifications

Series	Satellite Mini
Input voltage	120V AC, 60Hz
Color temperature	3000K
CRI	82+
Wattage	9.2W
Lumens	650Lm
Beam angle	109.6°
Dimming	Most triac and ELV dimmers
Lens	Frosted polycarbonate
Rating	cETLus Listed for damp locations
Dimensions	5-7/8" Dia. x 1"H
Mounting	Recessed or Surface Mount
LED type	SMD 2323
Rated life	35,000 hrs

Satellite Mini Disc Light



ST-MINI-30-WH

Satellite Mini - White
3000K / 9.2W / 650Lm