


PROJECT: TYPE:

LOCATION: CAT:

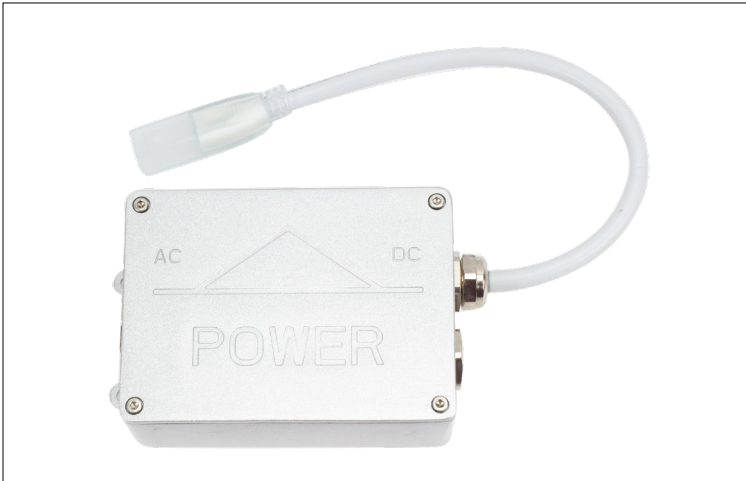

Description

120V Rectifier Junction box for use with 120V Hybrid 2 or Polar 2 Neon

Features

- For use with either Hybrid 2 or Polar 2 products
- Sturdy aluminum housing is IC rated
- Integrated junction box compartment with two DC output ports and attached Hybrid 2 or Polar 2 Neon conkit
- Allows for up to 3000W connection (1500 watts per port)
- Includes two compression clamps (1 attached, 1 extra)
- 7/8" threaded input
- cETLus Listed for wet locations; Suitable for indoor and outdoor use

Mounting

2 mounting tabs allow box to be screwed down to solid surface

Applications

120-JBOX-H2 is intended for use with 120-H2 product only.
120-JBOX-P2 is intended for use with 120V P2-NF product only.

Warranty

3 years


Technical Information



| | | |
|---------------------|--|-----------|
| Model | 120-JBOX-H2 | 120-JBOX- |
| Output DC Voltage | 120V DC | |
| Maximum Load | 3000W; 6x150ft per port | |
| Input Voltage Range | 120V AC | |
| Input current | 0.033A | |
| Frequency Range | 60Hz | |
| Operating Temp | -4°F to 122°F (-20°C to 50°C) | |
| Rating | cETLus Listed; Wet locations; Indoor and outdoor use; RoHS Compliant | |

120-LIN-JBOX is intended for use with or 120-H2 product only. 120-JBOX-P2 is intended for use with 120V P2-NF product only.


Dimensions

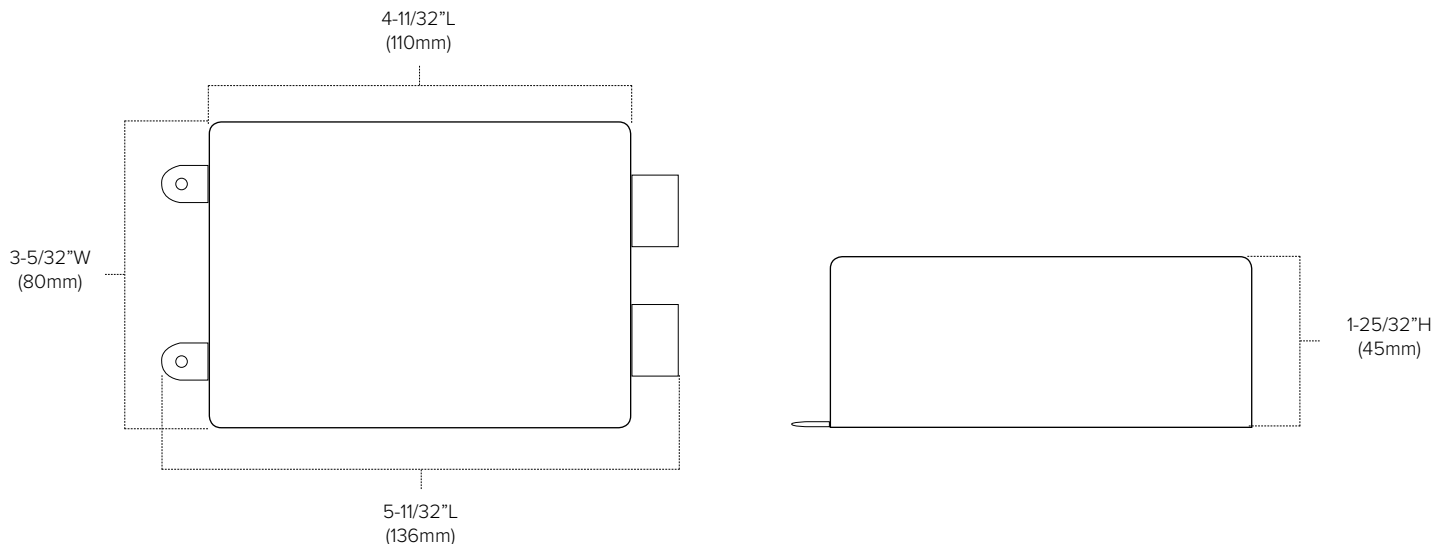



Ordering Information

**120V AC to DC
Rectifier Jbox**




120JBOX-H2 Includes:

- (1) Pre-attached 120-H2-CONKIT
- (1) Additional H2 Conkit
- (2) Compression clamps
- (1) Extra 125V 8A fuse
- (1) Hex wrench

120JBOX-P2 Includes:

- (1) Pre-attached 120-P2-CONKIT
- (1) Additional P2 Conkit
- (2) Compression clamps
- (1) Extra 125V 8A fuse
- (1) Hex wrench

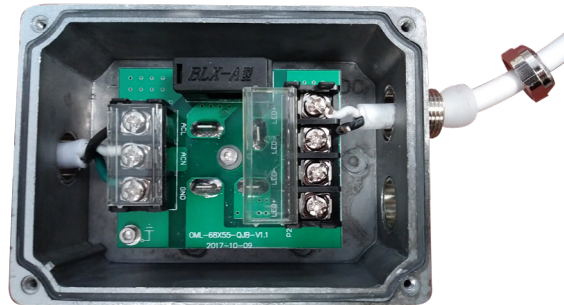

NOTES
