




PROJECT:

TYPE:

LOCATION:

CAT:

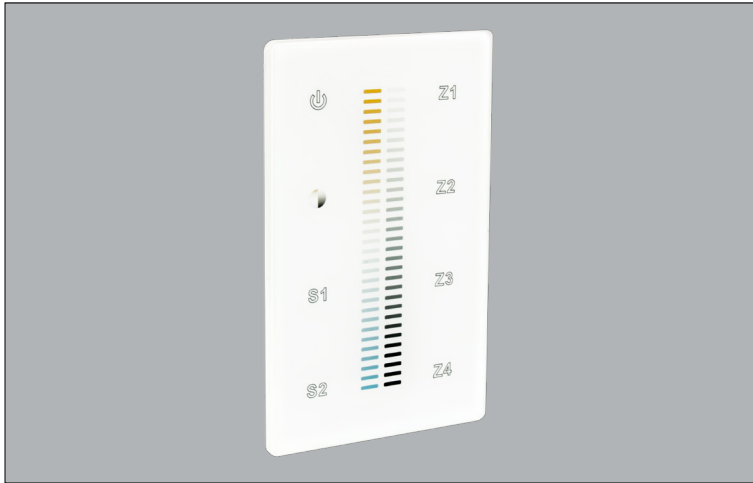

**Description**

Trulux back-lit touch wall control for tunable CCT light control; 1-4 operation with 1-3 scene control.

**Features**

- Touch for On/Off control
- Swipe for 2700K-6000K light control and full range dimming (5-100%)
- Toggle between tunable CCT and brightness control
- Smooth glass faceplate with illuminated controls
- Radio frequency (RF) signal range up to 65 feet
- Control multiple receivers in multiple zones (1-4)
- 3 customizable scenes
- Requires 12-24V DC input
- Requires Trulux RF receiver for operation (sold separately)

**Mounting**

Flush mount to wall or flat surface (1-3/4" x 2-5/8" cut-out)

**Applications**

Dimming, zone, and scene control for tunable CCT

**Warranty**


3 years

## Technical Information



Voltage	12-24V DC
Power Consumption	200mA
Frequency	916.5Hz RF wireless
Operating Temperature	0° - 40°C
Relative Humidity	8% - 80%
Rating	FCC Compliant, RoHS Compliant, dry location

**Dimensions**

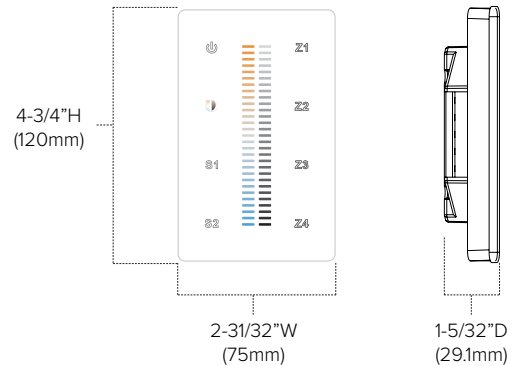


## Required Receivers

Part Number	Description	Application	Input	Current	Output	Listing	Dimensions
REC-5A-4Z	Trulux RF Constant Voltage Receiver	Dry location	12-36V DC	4x5A	4x(60-180)W	RoHS	7-1/16" x 1-13/16" x 6-23/32" (178.9mm x 45.5mm x 18.6mm)

Controller can be powered from secondary side of 12-24V DC driver being used to power the Trulux receiver/Trulux tape light.  
See 'Trulux Control Options' for selected tape light for more information.

## Ordering Information

**Trulux Back-lit  
Touch Wall  
Control**



**TWRF-4Z includes:**

(1) Trulux Back-lit Touch Wall Control  
(requires 12-24V DC input & Trulux receiver)

Example Part # **TWRF-4Z**

