



Features

- 2700K color temperature
- Selectable High/Low/Off switch
- Includes bi-pin G8 Xenon lamps
- Lasts three times longer than halogen
- Dimmable with standard incandescent dimmers
- Direct hardwire installation
- cULus Listed for dry locations
- 8,000 hours rated life

Available Sizes

8" / 16" / 24" / 32"

Available Finishes



White

Dark Bronze

Dimming Options

- TRIAC (1-100%)

Listing / Ratings




LXC

Captive mounting screws and standard 1/2" knockouts located every 4" along the back and along the top make hardwire installations straightforward. Available in four sizes and two finishes for hardwire applications only.

Technical Information

Series	LXC
Input Voltage	120V AC, 60Hz
CCT	2700K
CRI	99+
Wattage	Up to 80W (see individual product)
Lumens	Up to 336Lm (see individual product)
Beam Angle	120°
Max Run	N/A
Dimmable	1-100%
Mounting	Surface mount
Rating	cULus Listed (dry location)
Rated Life	8,000 hrs

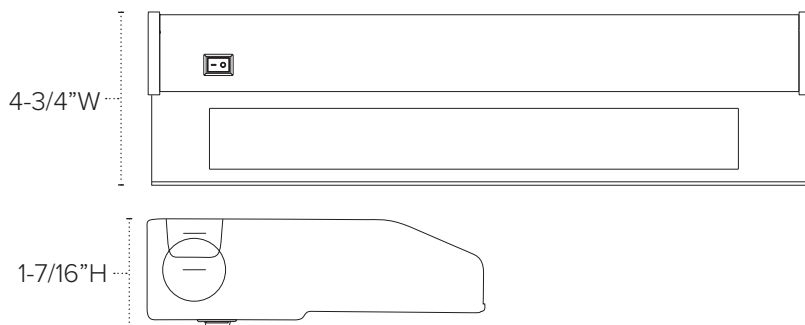

LXC



LXC - White

LXC1H-WH (8.25" / 20W / 84Lm)**LXC2H-WH** (16.5" / 40W / 168Lm)**LXC3H-WH** (24.5" / 60W / 252Lm)**LXC4H-WH** (32.5" / 80W / 336Lm)

LXC - Dark Bronze

LXC1H-DB (8.25" / 20W / 77Lm)**LXC2H-DB** (16.5" / 40W / 153Lm)**LXC3H-DB** (24.5" / 60W / 230Lm)**LXC4H-DB** (32.5" / 80W / 306Lm)

LXC fixtures include: (1) 3/8" cable connector / (1-4) 20W xenon lamps / Captive mounting screws

LXC Accessories



Replacement Lamp

043X-20BP (20W bi-pin G8)