



## Features

- 2700K-6000K tunable white light
- 24V DC fixtures link up to 96 watts
- Low profile design - less than 3/8" high
- Requires Trulux Tunable CCT control
- cETLus Listed for dry locations

## Available Lengths

8" / 16" / 22" / 34"

## CCT Range



2700K-6000K  
Tunable CCT

## Available Finish



White

## Control Options

- Trulux Tunable CCT Controls w/EdgeLink Driver  
- Requires EdgeLink Driver/J-box + Trulux Receiver
- Trulux Tunable CCT Controls w/LED-DR Driver  
- Requires LED-DR Driver + Trulux Receiver

## Listing / Ratings




## Tunable EdgeLink Flat Panel

Super low-profile, high CRI LED flat panel fixtures are available in four sizes with 2700K-6000K tunable LED light (requires Trulux Tunable CCT control system, sold separately). Linkable up to 96 watts to accommodate virtually any application. Tunable EdgeLink Panels feature 2700K-6000K Lume I FX technology (perfect for pairing with Tunable Pucks).

## Technical Information

Series	EDGE-TW
Input Voltage	24V DC
CCT	2700K-6000K Tunable CCT
CRI	88/92+
Wattage	7W / 13W / 19W / 24W
Lumens	Up to: 340Lm / 675Lm / 1000Lm / 1200Lm
Beam Angle	120°
Max Run	Dependent on driver (linkable up to 96W max)
Dimmable	5-100% (requires Trulux Tunable CCT Control)
Mounting	Surface mount
Rating	cETLus Listed (dry locations)
Rated Life	35,000 hrs

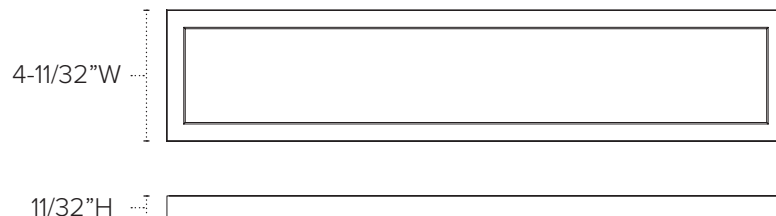

## Tunable EdgeLink Flat Panel



EdgeLink LED Flat Panel  
 Tunable CCT 2700K-6000K  
**EDGE-TW-8-WH** (8" / 7W / up to 340Lm)  
**EDGE-TW-16-WH** (16" / 13W / up to 675Lm)  
**EDGE-TW-22-WH** (22" / 19W / up to 1000Lm)  
**EDGE-TW-34-WH** (34" / 24W / up to 1200Lm)

Tunable EdgeLink fixtures include: (1) 6' 20AWG Power Connector Wire with mounting tack nails / (1) End-to-end linking connector  
 (1) Magnetic mounting plate with Mounting screws

### EdgeLink Accessories



EdgeLink Driver/Junction Box  
 cETLus Listed / Includes knockouts  
**DRJ-BOX-60** (60W / White)  
**DRJ-BOX-96** (96W / White)



12' 20AWG Power Connector Wire  
**EDGE-CONKIT12** (12' / White)




Interconnectable Linking Cables  
**EDGE-EX6-WH** (6" / White)  
**EDGE-EX12-WH** (12" / White)  
**EDGE-EX24-WH** (24" / White)

### Trulux Tunable CCT Control w/EdgeLink Driver J-box Set-up



Push Dial Controller  
 (Single zone)

+




EdgeLink Driver/J-box  
 (60W, 96W)

+



Trulux RF Receiver  
 (Required)

+



EdgeLink Flat Panel

### Trulux Tunable CCT Control w/LED-DR Driver Set-up



Push Dial Controller  
 (Single zone)

+




LED-DR 24V Driver  
 (30W, 60W, 100W, 150W)

+



Trulux RF Receiver  
 (Required)

+



EdgeLink Flat Panel