

MEDIUM PROFILE

Compact area light with a square back and triangular profile is suitable for exterior corridors, landings, and other smaller security/area lighting applications.

Performance

- Smaller scale fixture for walkways and landings uses only 14 watts and emits 740 lumens
- Save 72% compared to 50 watt conventional sources
- Long life high output Cree COB saves in labor costs by reducing lamp replacements and eliminating ballast maintenance

Construction


- Die-cast aluminum body with internal 120-240V driver
- Cree COB is mounted to built-in aluminum heat sink plate for great heat dissipation
- Frosted prismatic polycarbonate lens reduces glare and protects LEDs

Installation

- Installation requires T15 torx security bit
- Remove rear mounting plate to access built-in universal mounting bracket



Photometrics

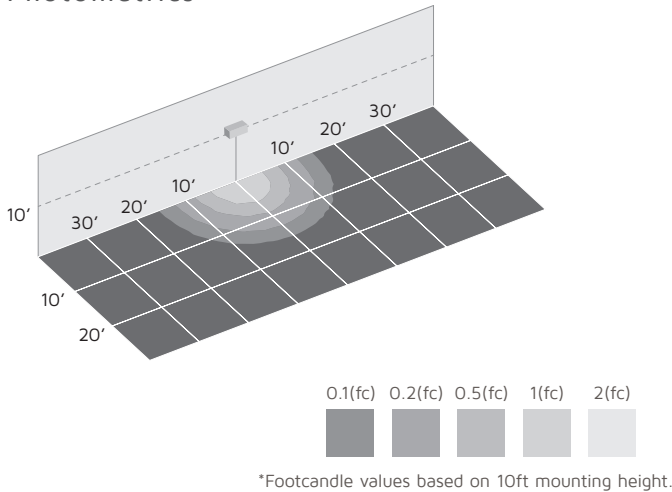

Specifications

Series	WP-LP-50-DB
Input voltage	120-240V, AC
Color temperature	5000K
CRI	75+
Wattage	14W
Lumens	740Lm
Beam angle	120°
Housing	Die-cast coated aluminum
Lens	Frosted polycarbonate
Rating	c/UL/us Listed for wet locations
Dimensions	6-1/2"W x 7"H x 6-1/2"D
Switching	Branch circuit
Mounting	Surface mount
LED type	Cree COB (Chip on Board) LED
Rated life	50,000 hrs

Medium Profile Wall Mount



WP-LP-50-DB

Medium Profile Wall Pack
14W / 740Lm