



PROJECT: TYPE:

LOCATION: CAT:



Description

Trulux RF RGB/RGB+WW hand-held remote control for RGB/RGB+WW light control; 1-8 zone operation, 10 preset levels, and 1-8 scene memory.

Features

- Press center for On/Off control
- Press B- or B+ for full range dimming (1-100%)
- Color adjustment wheel for fast and accurate adjustments
- Save up to 3 customizable scenes/color temperatures and up to 4 zones
- Radio frequency (RF) signal range up to 65 feet
- Control multiple receivers in multiple zones
- Battery operated (3xAAA battery not included)
- Requires Trulux RF receiver for operation (sold separately)

Mounting

Hand-held remote includes wall-mount caddy

Applications

Dimming, CCT, scene control, and zone control for RGB/RGB+WW

Warranty


5 years

Technical Information



Voltage	4.5V DC Operation voltage (battery operated)
Battery Type	(3) AAA (not included)
Frequency	916.5MHz RF wireless
Operating	0° - 40°C
Relative Hu-	8% - 80%
Rating	FCC Compliant, RoHS Compliant, dry location

Dimensions

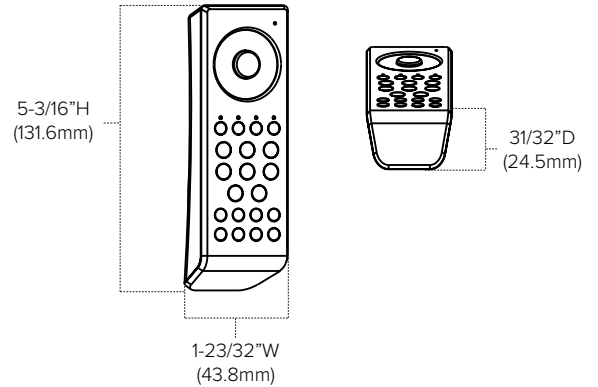

Required Receivers

Part Number	Description	Application	Input	Current	Output	Listing	Dimensions
REC-5A-4Z	Trulux RF Constant Voltage Receiver	Dry location	12-36V DC	4x5A	4x(60-180)W	RoHS	7-1/16" x 1-13/16" x 6-23/32" (178.9mm x 45.5mm x 18.6mm)

Ordering Information



RF-RGBW-3AAA includes:

(1) Trulux RGB+WW Remote Control (requires (3) AAA batteries & Trulux receiver sold separately)

Example Part # **RF-RGBW-3AAA**

